

**Specification for polyvinyl chloride insulated cables of  
rated voltages up to and including 450/750 V  
Part 1: General requirements**


**AMENDMENT NO. 1**

December 2017


**1. Page 12, 3.1.1 Continuity of marks**

Add the following text and figures:

See Figure 1 and Figure 2 for examples of markings.

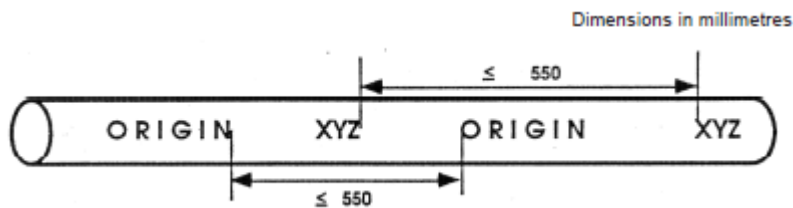

**Figure 1 – Example of the marking on the outer sheath of the cable  
© CENELEC, reproduced with permission**

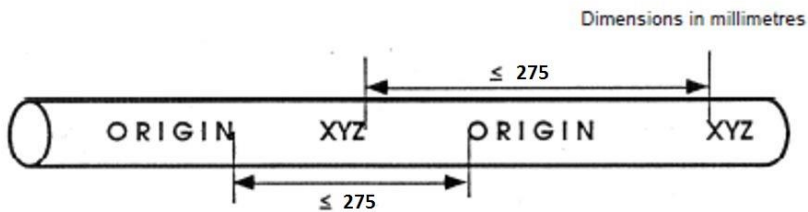

**Figure 2 – Example of the marking on the insulation or on a tape  
© CENELEC, reproduced with permission**

**2. Page 13, 4.1.2 Colour scheme**

Add the following text:

For local requirements, colour scheme for cables should follow Amendment 1 of CP 5 : 1998 Table 7C and Table 7D.

Singapore Standard SS 358 : Part 1 : 2011 (2017)  
Amendment No. 1

**3. Page 22, Table 3 Requirements for electrical tests for PVC insulated cables**

*Replace* the test conditions for 2.1 and 3.1 with the following:

2.1	Test conditions:				
	– minimum length of the sample	m	10	10	10
	– minimum period of immersion in water	h	1	1	1
	– temperature of the water	°C	20 ± 15	20 ± 15	20 ± 15

3.1	Test conditions:				
	– length of sample	m	5	5	5
	– minimum period of immersion in water	h	1	1	1
	– temperature of the water	°C	20 ± 15	20 ± 15	20 ± 15