

CODE OF PRACTICE FOR LIGHTNING PROTECTION

AMENDMENT NO. 2

June 2004

1. Page 34, Table 3.2 Recommended materials for the manufacture of lightning protection components

Insert the following text as NOTE 5:

5. All references are subject to revision, and users of these standards are encouraged to investigate the possibility of applying the most recent editions of the documents indicated in the table.

2. Page 45, 3.13.1 General considerations

Insert the following at the end of 3.13.1:


- (g) Covers and frames of the earth electrode inspection chamber shall be designed to prevent the collection of stagnant water.

3. Page 47, Figure 3.8 Earth electrode connection

Replace the existing diagram with the attached Figure 3.8.

4. Page 63, clause 5.4.4 Downconductors

Replace "500 mm" with "1500 mm".

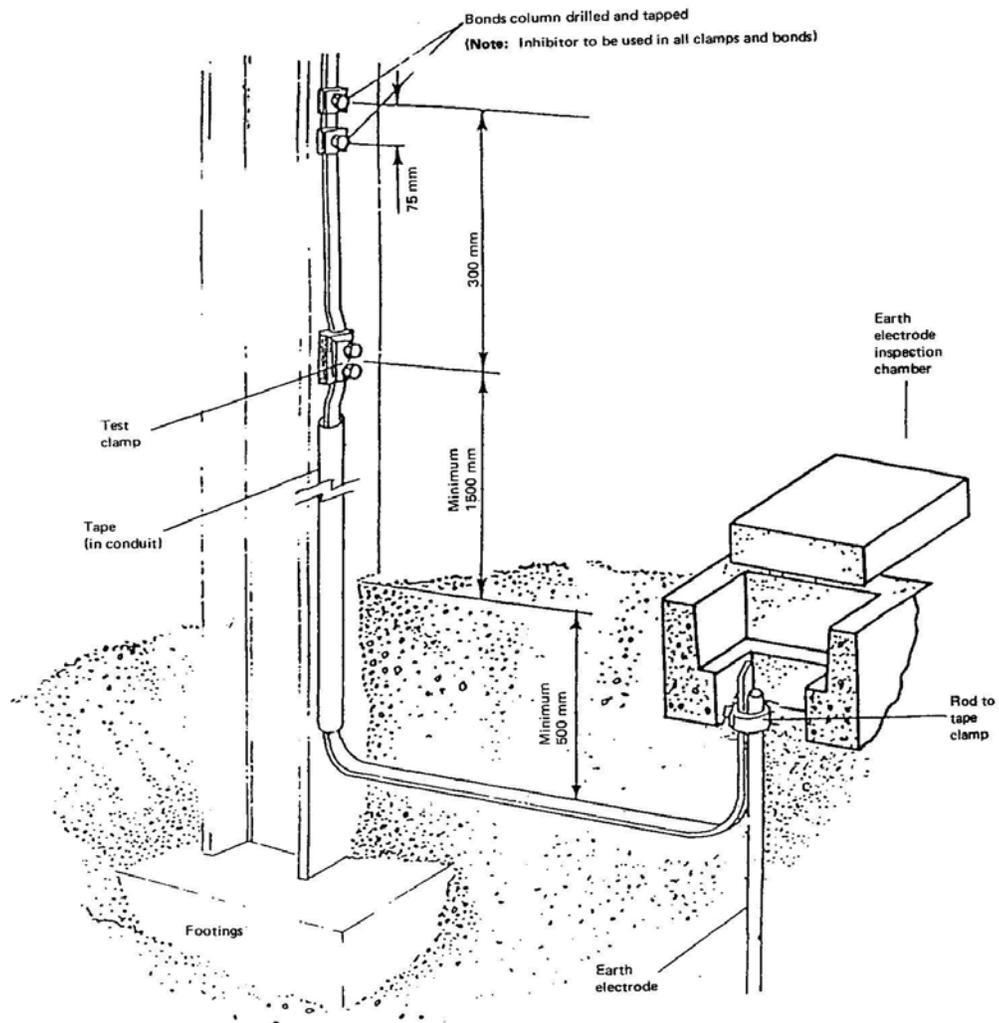

NOTE: This diagram is not to scale

Figure 3.8 – Earth electrode connection